




Durometers for Lobsters, Snow & Dungeness Crabs



Made In U.S.A.

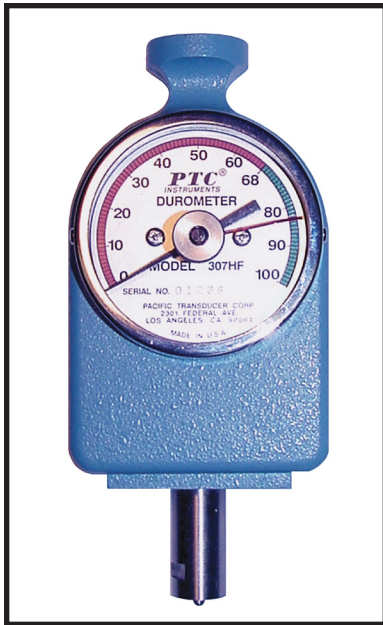

Model 307HF Durometer
for determining shell hardness of snow crabs

307HF

- **Test Snow Crabs As “Soft” or “Hard”**
- **Dial Color Coded**
 - 0 to 68 -- Red Zone
 - 68 to 100 -- Green “Safe” Zone
- **Max Hold Pointer Standard**
- **NIST Certification Available**
- **Unit Is Sealed with Silicone Grease**
- **1/2” O.D. x 1” Long Base Extension**

This durometer was developed to help the Canadian Department of Fisheries and Oceans limit the percentage of soft shell snow crabs in a fisherman’s catch. By checking the hardness of the claw, recently molted (soft) crabs with low meat yield can be avoided.



Model 307LCRBIV Durometer
for measuring shell hardness of Dungeness crabs

307LCRBIV

- **Test Dungeness Crab Shell Hardness**
- **Dial Scale of 0 to 100 Points**
- **Max Hold Pointer Standard**
- **NIST Certification Available**
- **Easy to Read 0 to 100 Point Dial**
- **Unit Is Sealed with Silicone Grease**
- **1/2” O.D. x 3-1/2” Long Base Extension**

Developed with the Alaska Dept. of Fish and Game, this durometer accurately measures the indentation hardness of the Dungeness crab shell. This durometer can be used to determine if a population of crabs has matured enough such that the soft-shelled population is small enough to warrant a fishery.

TOLL FREE: 877-782-2329
OUTSIDE U.S.: 310-478-1134
LOS ANGELES, CA 90064-1482

WEB: [HTTP://WWW.PTC1.COM](http://www.ptc1.com)
E-MAIL: SALES@PTC1.COM
FAX: 310-312-0826






Model 307LOB Durometer
for determining lobster shell hardness

307LOB

- **Test Lobster Shell Hardness**
- **Dial Scale of 0 to 100 Points**
- **Max Hold Pointer Standard**
- **NIST Certification Available**
- **Easy to Read 0 to 100 Point Dial**
- **Unit Is Sealed with Silicone Grease**
- **1/2" O.D. x 3-1/2" Long Base Extension**

This durometer has a force curve similar to the Model 307HF, but with a longer base extension. It is normally used to measure the portion of the carapace which is the slowest to re-harden. This hardness reading is then used as a guide to determine molt stages.

Typical PTC® Durometer Styles

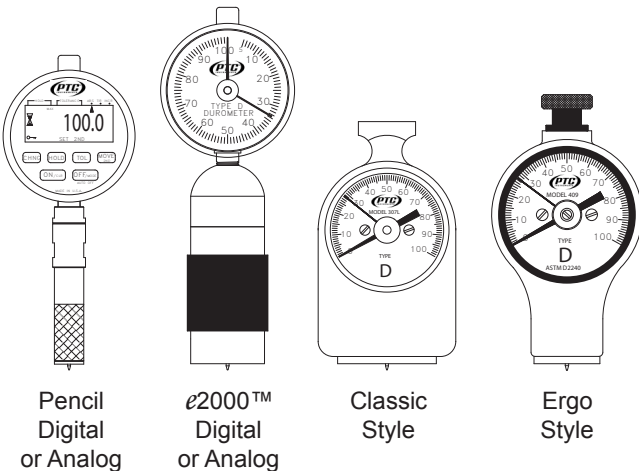

Pencil
Digital
or Analog

e2000™
Digital
or Analog

Classic
Style

Ergo
Style

LIMITED LIABILITY WARRANTY

PTC® products are covered by a limited liability warranty from defects in material and workmanship for one year from date of purchase. This warranty does not apply if, in the judgement of PTC®, the product fails due to damage from shipment, handling, storage, accident, abuse or misuse, or if it has been used or maintained in a manner not conforming to product's instructions, has been modified in any way, or has a defaced or removed serial number. Repair by anyone other than PTC® or an approved agent voids this warranty. The maximum liability of PTC® is the product purchase price.



PTC Metrology™ is accredited by A2LA for durometer calibration to ISO/IEC 17025 & ANSI/ NCSL Z540-1. NIST traceable certification is available for all durometer types covered by current ASTM D2240, ASTM F1957, ISO 868, ISO 7619, and DIN 53505 Standards.

The Calibration Report will include both "as received" and "as left" data. Complete durometer calibration includes: indenter geometry and extension, indicator linearity, and force curve.

Other durometer types, custom models, and durometers of any manufacture can also be certified by PTC Metrology™.



TOLL FREE: 877-782-2329
OUTSIDE U.S.: 310-478-1134
LOS ANGELES, CA 90064-1482

WEB: [HTTP://WWW.PTC1.COM](http://www.ptc1.com)
E-MAIL: SALES@PTC1.COM
FAX: 310-312-0826