




Jumbo Display Digital Probe Thermometer Model 11061

Flash Check® Jumbo Display Auto-Cal Digital Probe Thermometer

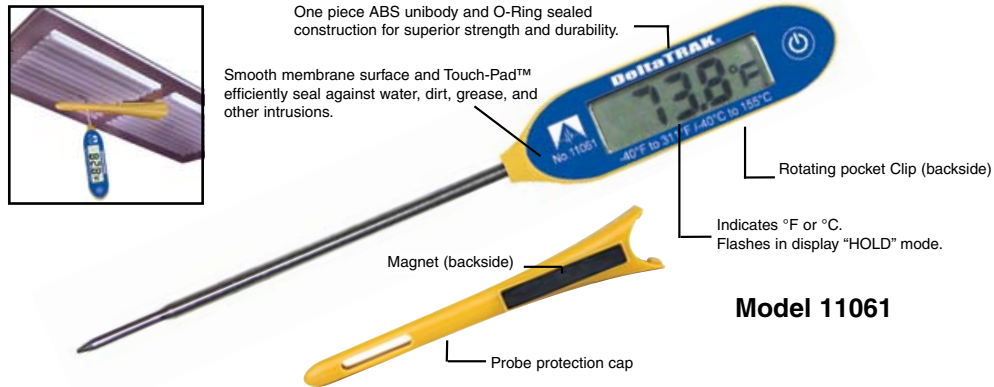

This unique, next-generation, Digital Pocket Probe Thermometer is engineered to set the industry standard for accuracy, durability and readability. It is designed and constructed under exacting standards to meet and exceed specifications required for commercial and professional uses.

- New "Auto-Calibration" feature
- Reduced tip probe provides less than six (6) second response time
- Probe cover with a magnet designed to attach thermometer to a vent
- Sealed unibody construction and RoHS-compliant
- IP56 waterproof and grease resistant
- Velcro strap included to secure thermometer to refrigerant pipes
- High visibility yellow casing

PATENT NO. 5,709,476
5,801,968



Measurement Range	-40°F to 311°F (-40°C to 155°C)
Accuracy	1°F from -4°F to 113°F (1.8°F otherwise) 0.5°C from -20°C to 45°C (1°C otherwise)
Response Time	Less than 6 seconds 32°F to 77°F (0°C to 25°C)
Resolution	0.1°(F or C)
Display Size/Update	1.5" x 0.5" (38mm x 12.7mm)/Every 2 Seconds
Waterproof Rating	IP56
Probe Length and Tip Diameter	Stainless steel probe, length 3.9 +/- 0.004 in. (99 +/- 0.1mm); Reduced probe tip 0.1 in (2.6mm) dia.
Body	ABS plastic
Factory Calibration	NIST traceable calibration certified
Compliance Certificate	Manufacturers certificate of compliance available from DeltaTRAK, NIST Traceable, CE
Battery	1.5V button

TOLL FREE: 877-782-2329
OUTSIDE U.S.: 310-478-1134
LOS ANGELES, CA 90064-1482

WEB: HTTP://WWW.PTC1.COM
E-MAIL: SALES@PTC1.COM
FAX: 310-312-0826

